



The fuel efficiency driver

Conti EcoPlus

Conti EcoPlus

- › Excellent fuel efficiency
- › High mileage performance
- › Premium retreadability



* valid for Conti EcoPlus HT3 (22.5)


Conti EcoPlus HS3

Conti EcoPlus HD3

Conti EcoPlus HT3

Conti EcoPlus

The high performance tyres that save litres off your fuel bill.



GENERATION 3. DRIVEN BY YOUR NEEDS.


Conti EcoPlus

Our Conti EcoPlus tyre range sets new standards for the economy of your fleet.

Our tyres have been optimised to significantly reduce the fuel consumption of the complete truck when driving mainly on motorways. Axle by axle, the rolling resistance of these new long-distance tyres has been refined down to the finest detail.

Outstanding fuel efficiency combined with high mileage capabilities - our newly developed Conti EcoPlus range is the best choice for your lowest overall driving costs.

Improved rolling resistance per axle compared to predecessor

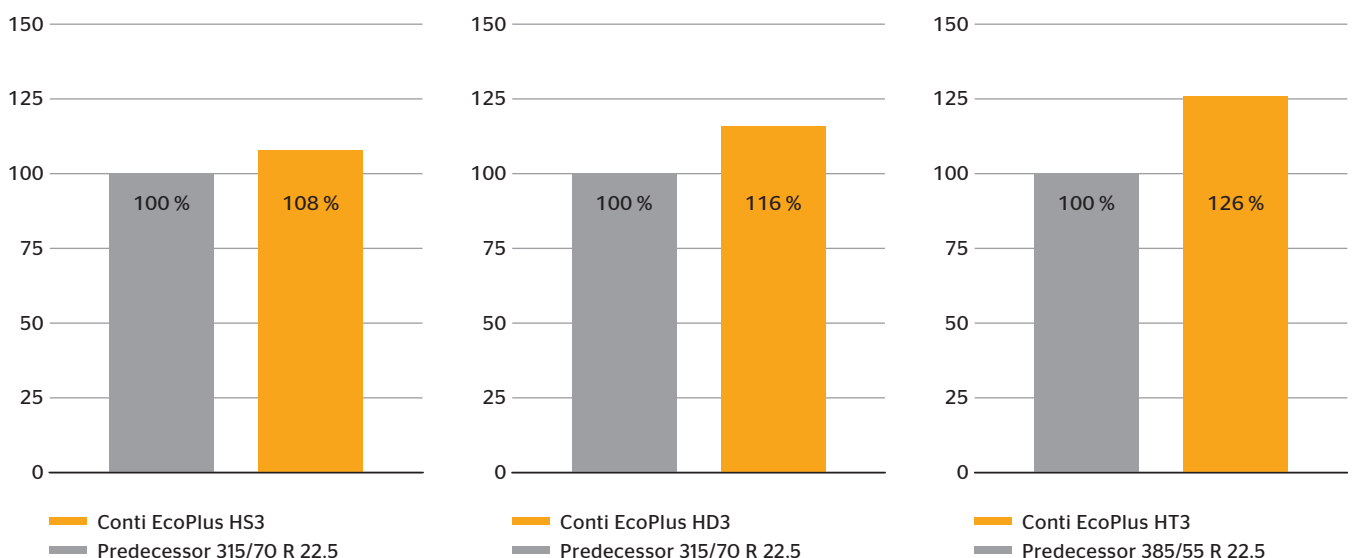


Optimised for ContiLifeCycle™

Our premium casing, with Air-Keep inner liner, triangular belt and bead with steel cord chafer, guarantees high retreadability. The new regrooving indicators make regrooving faster and easier. Our EcoPlus range is perfectly tailored to our ContiLifeCycle™.


* valid for Conti EcoPlus HS3 315/70 R 22.5, HD3 315/70 R 22.5 and HT3 385/55 R 22.5 in comparison to predecessor

Conti EcoPlus HS3

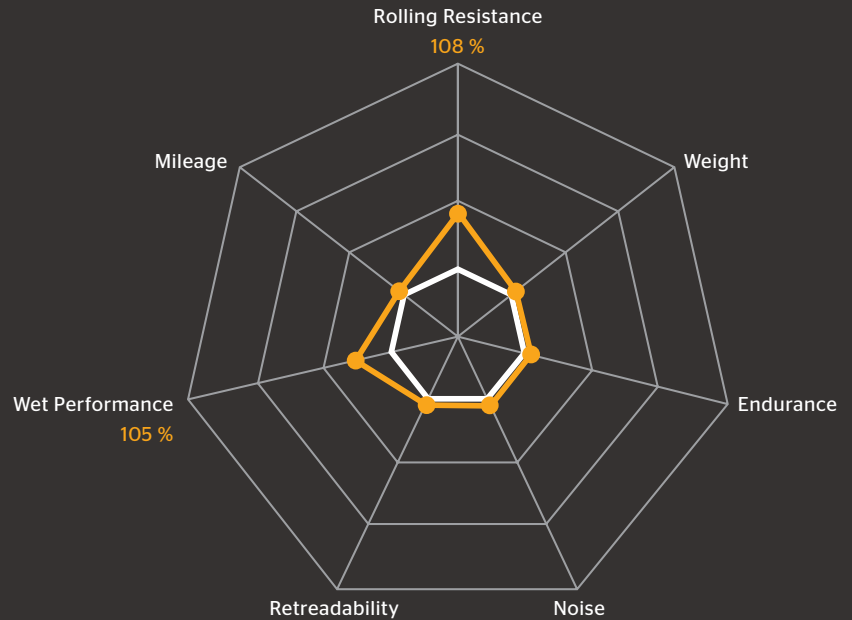


— Conti EcoPlus HS3
 — Compared to predecessor 315/70 R 22.5

Product highlights

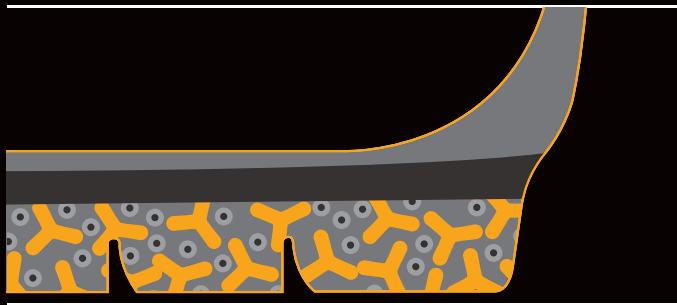

- › The two-layer tread construction combines high mileage performance in the cap compound with significant rolling resistance improvements in the base compound
- › Plus Volume Pattern: smaller groove widths add tread material and increase wear resistance to guarantee high mileage performance
- › Wet performance pocket sipes: a new siping technology with full-depth sipes enhances water displacement and improves wet performance

Regrooving recommendations

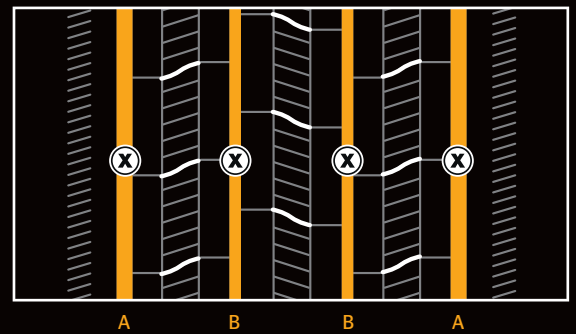


Size	Depth (mm)	Width (mm)
355/50 R 22.5	*	*
385/55 R 22.5	*	*
295/60 R 22.5	*	*
315/70 R 22.5	2.5	A : 10 B : 8
315/80 R 22.5	3.0	A : 10 B : 8

* in preparation

All EcoPlus steer axle tyres are provided with the Continental Visual Alignment Indicator (VAI™).

Conti EcoPlus HD3

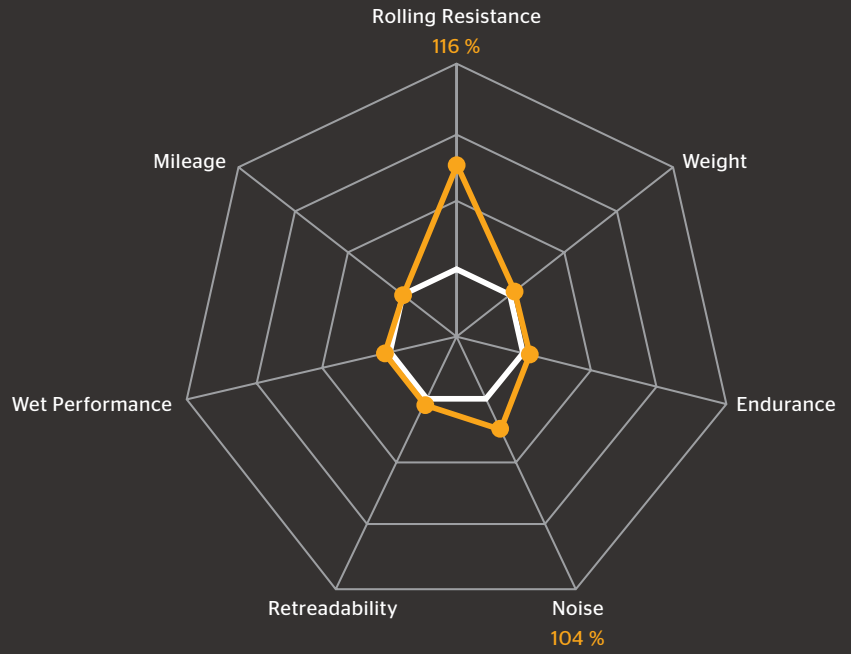


— Conti EcoPlus HD3
 — Compared to predecessor 315/70 R 22.5

Product highlights



- › The new tread compound provides considerable improvements in rolling resistance at constant mileage performance
- › New pattern and shoulder layout: a new layout with wide blocks optimises the footprint. This creates less deformation energy and leads to less fuel consumption
- › Chamfered Edge: the Chamfered Edge reduces deformation amplitude in sidewall and bead area, resulting in an improved rolling resistance, helping to lower fuel consumption

Regrooving recommendations

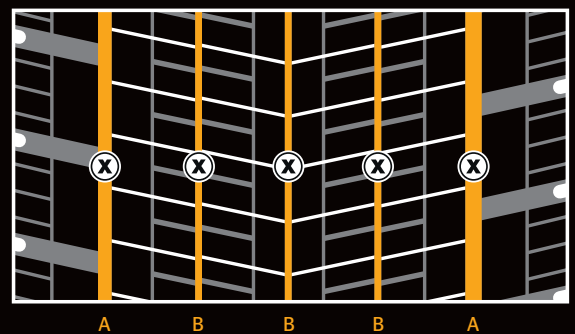

Size	Depth (mm)	Width (mm)
295/55 R 22.5	*	*
295/60 R 22.5	*	*
315/60 R 22.5	*	*
315/70 R 22.5	3.0	A:8 B:5
315/80 R 22.5	3.0	A:8 B:5

* in preparation

All EcoPlus drive axle tyres are provided with the Three Peak Mountain Snow Flake (3PMSF) symbol.

¹⁾ Three Peak Mountain Snow Flake
 "Snow tyre" means a tyre [...] designed to achieve in snow conditions a performance better than a normal tyre [...].
 Source: Economic Commission for Europe of the United Nations (UN/ECE), R117




Conti EcoPlus HT3




* improvement in rolling resistance

— Conti EcoPlus HT3
— Compared to predecessor 385/55 R 22.5

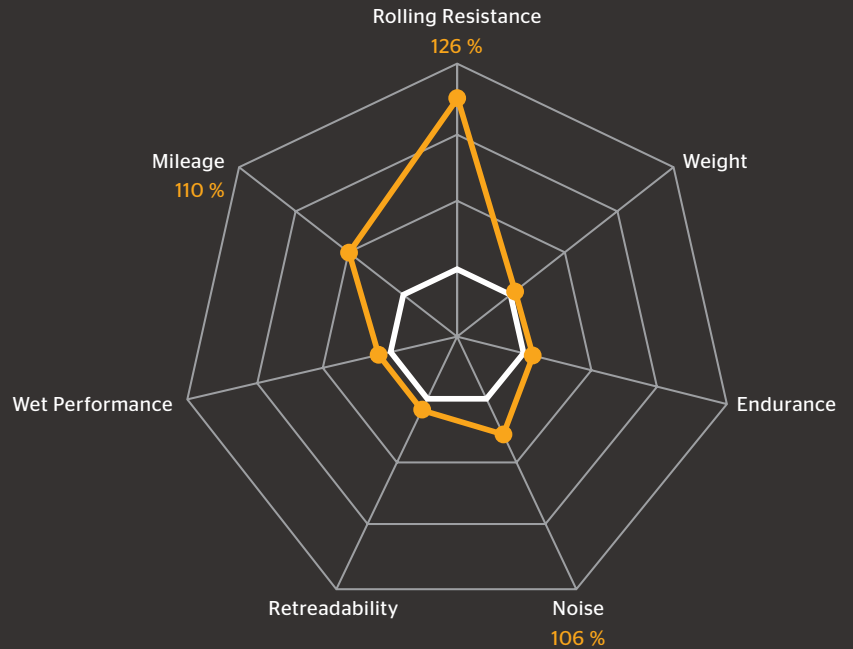


Product highlights

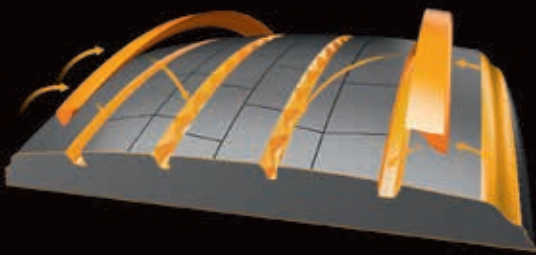

- › Our new tread pattern with Fuel Saving Edge scores with reduced rolling resistance and high mileage capability
- › Two-layer tread construction delivers outstanding improvements in rolling resistance
- › New groove geometry for optimised pressure distribution and uniform wear
- › Conti EcoPlus tread compound: the tread compound with advanced polymer structure and the sidewall compound add up to a significant improvement in rolling resistance, resulting in fuel saving for you.

Regrooving recommendations

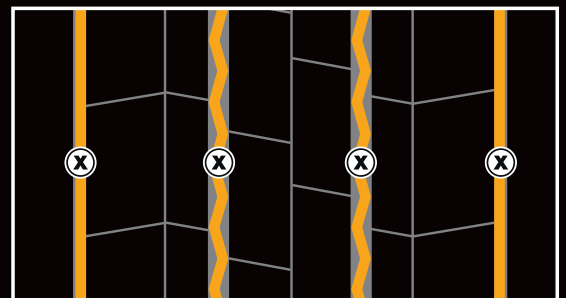

Size	Depth (mm)	Width (mm)
385/55 R 19.5	2.5	6
385/55 R 22.5	2.5	6
385/65 R 22.5	2.5	6

GENERATION 3. DRIVEN BY YOUR NEEDS.

Technical data and air pressure recommendations

Tyre size	Operating code				EU tyre label				Rim		Tyre dimensions						Load capacity (kg) per axle at tyre pressure ⁶⁾ (bar) (psi)						
	Pattern	LI/SI ¹⁾	PR	M+S	Speed Index and reference speed (km/h)	TT/TL ²⁾	A ³⁾	B ⁴⁾	C ⁵⁾	Rim-width	Min. distance between rim centers	Max. standard value in service		Actual value		Stat. radius	Rolling circumference	LI ¹⁾	Tyre fitment	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)
												Width	Outer-Ø	Width +1%	Outer-Ø ± 1%								
385/55 R 19.5	Conti EcoPlus HT3	156/ - J	16		J 100	TL	B	C	◊ 69	11.75 12.25		396 401	935	381 386	919	422	2785	156	S	6910	7280	7640	8000
355/50 R 22.5	Conti EcoPlus HS3 XL	156/ - K	18		K 110	TL	**	**	**	11.75		375	942	361	928	435	2812	156	S	6910	7280	7640	8000
295/55 R 22.5	Conti EcoPlus HD3	147/145 K	16	M+S	K 110	TL	**	**	**	9.00 9.75	329 338	304 312	908	292 300	896	422	2715	147 145	S D	5315 10025	5595 10555	5875 11080	6150 11600
385/55 R 22.5	Conti EcoPlus HS3	160/ - K (158/ - L)	20		K 110 (L 120)	TL	**	**	**	11.75 12.25		396 401	1012	381 386	996	461	3020	160 158	S S	7775 7690	8190 8095	8595 8500	9000
	Conti EcoPlus HT3	160/ - K (158/ - L)	20		K 110 (L 120)	TL	A	C	◊ 69														
	ContiRe EcoPlus HT3	160/ - K (158/ - L)	20		K 110 (L 120)	TL	-	-	-														
295/60 R 22.5	Conti EcoPlus HS3	150/147 L	18		L 120	TL	**	**	**	9.00 9.75	329 338	304 312	940	292 300	926	434	2806	150 147	S D	5790 10630	6095 11190	6400 11750	6700 12300
	Conti EcoPlus HD3	150/147 L	18	M+S	L 120	TL	**	**	**														
315/60 R 22.5	Conti EcoPlus HD3	152/148 L	20	M+S	L 120	TL	**	**	**	9.00 9.75	344 352	318 326	966	305 313	950	442	2880	152 148	S D	6135 10885	6460 11465	6780 12035	7100 12600
385/65 R 22.5	Conti EcoPlus HT3	160/ - K (158/ - L)	20		K 110 (L 120)	TL	A	C	◊ 69	11.75 12.25		405 410	1092	389 394	1072	495	3250	160 158	S S	7775 7690	8190 8095	8595 8500	9000
	ContiRe EcoPlus HT3	160/ - K (158/ - L)	20		K 110 (L 120)	TL	-	-	-														
315/70 R 22.5	Conti EcoPlus HS3 XL	156/150 L (154/150 M)	18		L 120 (M 130)	TL	B	B	◊ 69	9.00 9.75	351 358	318 326	1032	312 320	1014	468	3090	156 154 152 150 148	S S S D D	6910 6480 6420 11580 11395	7280 6825 6760 12195 12000	7640 7160 7100 12800 12600	8000 7500
	Conti EcoPlus HD3	154/150 L (152/148 M)	18	M+S	L 120 (M 130)	TL	B	B	◊ 72														
315/80 R 22.5	Conti EcoPlus HS3	156/150 L (154/150 M)	20		L 120 (M 130)	TL	B	B	◊ 69	9.00 9.75	351 360	318 326	1096	312 320	1076	500	3280	156 154 150	S S D	6910 6785 12120	7280 7140 12765	7640 7500 13400	8000
	Conti EcoPlus HD3	156/150 L (154/150 M)	20	M+S	L 120 (M 130)	TL	B	B	◊ 72														

Data acc. to DIN 7805/4, WdK-Guidelines 134/2, 142/2, 143/14, 143/25

1) Load index single/dual wheel fitment and speed symbol

2) TT = Tube Type, TL = Tubeless

3) Fuel efficiency

4) Wet grip

5) External rolling noise (db)

6) For tyre pressures of 8.0 bar (116 psi) or greater, use valve slit cover plate

* in preparation

** Label values in preparation

Continental 
The Future in Motion

6BFBD.en 2014.01

Continental Tyre Group Ltd.
191 High Street
Yiewsley, West Drayton
Middlesex UB7 7XW

<https://www.continental-tyres.co.uk/truck>

